



ॐ
॥ श्री गणेशाय नमः ॥



BHARAT VALVE AND FITTINGS

Mfgr. Stockist & Suppliers of:
INDUSTRIAL VALVE & DAIRY VALVE




📍 Shop No:2, 74 C. P. Tank Road, Mumbai-400004

📍 Shop No. 7, Grd Floor, 59/61, Velkar House, 2nd Panjrapole Lane, Gulalwadi, Mumbai - 400 004.

☎ +91 98335 28654 / 70213 29294 / 9029437029 ☎ +91-22 6639 4427 / 6743 7573 / 6610 9545 ✉ sales@bharatvalve.com

Website : www.bharatvalve.com

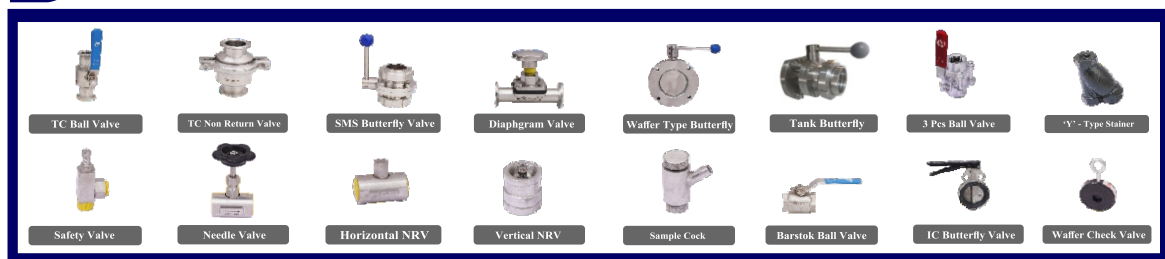


PNEUMATIC ACTUATOR OPERATED BALL VALVES

Actuator:
Single/Double Acting
Valve Body:
WCB / CF8 / CF8M
Ball:
CF8 / CF8M
Seat:
PTFE / GFT
End Connection:
Flanged Eng/
Screwed / Socket Weld
Size Range:
1 1/2" To 8"
(15mm to 200mm)



TUBE GLASS & DOUBLE WINDOW SIGHT GLASS

Material of Construction :
CF8/CF8M/CS/CI
End Connections :
Flanged & ASA150-
SEAT - PTFE :
GLASS -BOROSIL
Size Range :
15mm to 150mm



HIGH PRESSURE NEEDLE VALVE

Moc (Body):
S.S. 304 / 316
Pressure:
1000 PSIG/
3000 PSIG /
5000 PSIGGED End
Temp:
Upto 3000 C
Media:
Air / Water / Oil & Gas
Size Range:
6mm to 50mm



PNEUMATIC ACTUATOR OPERATED BUTTERFLY VALVES

Actuator:
Single/Double Acting
Valve Body:
Cast Iron / CS WCB
Disc:
S.G.Iron / CF8 / CF8M
Seat:
Nitrile / EPDM
Pressure Rating:
Pn10, Pn16
Orp. Temp.:
70C / 120C
Size Range:
1 1/2" To 20"
(40mm to 500mm)



DISC CHECK VALVE - NON SLAM

MATERIAL OF CONSTRUCTION :


Body:
CF8 / CF8M
Disc:
SS 304 / S.S. 316
Disc Seat:
Metal to Metal /
PTFE
Spring:
Standard
Max. Oper. Press.:
PN-40
Max. Oper. Temp.:
Upto 300C
Size Range:
1/2" To 8"



MANUALLY / PNEUMATIC OPERATED SPHERICAL DISH BUTTERFLY VALVES

Actuator:
Single / Double Acting
Valve Body:
Cast Iron
(Is210 GR.FG260)C.S.
Disc:
S.G.Iron / CF8 / CF8M
Seat:
PTFE
Pressure rating:
Pn10, Pn16, ASA-150#
Opr. Temp.:
180C / 220C
Size Range:
1 1/2" To 16"
(40mm to 400mm)



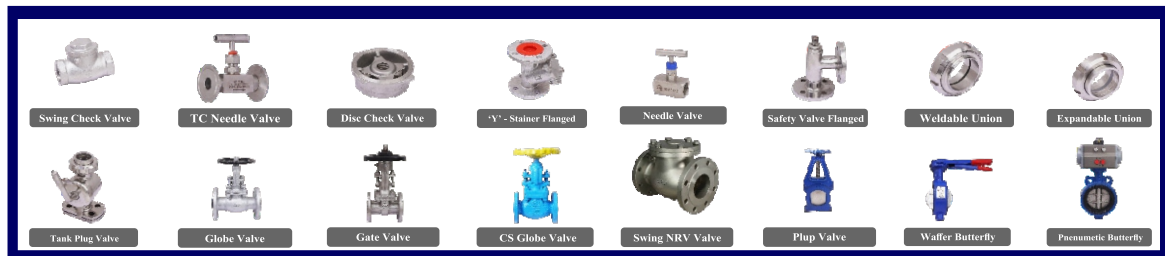

BUTTERFLY VALES

API 609 / BS-5155 / BS EN 593

Material Of Construction :

CI / DI / CS / SS

Seat & Seals :

Nitrile / Neoprene PTFE / Viton /

Hypalon / Silicon

End Connections

Wafer / Lug Ends

Pressure Rating :

ASA 125# / 150# / PN 1.0 / PN 1.6 /

PN 20 / PN 2.5

Type :

Centric Disc Design

Temp:

80C / 120C

Operation :

Lever I Gear

Size Range :

40mm to 500mm



NON RETURN VALVES

BS-1868 / API 6D

Material Of Construction :

CI / CS / SS

End Connections :

Screwed to BSP / BSPT / NPT /

Socket Weld / Flanged Ends

Pressure Rating :

ASA 125# / 150# / 300# /

PN 16 / PN 40 / PN 64

Type :

Swing / Lift-Up

Size Range :

15mm to 600mm



BALL VALVES -FLOATING TRUNNION MOUNTED

BS-5351 / BS 5159

Material Of Construction :

CI / CS / SS / A105 / F304 / F316 / CF3

Seat & Seals:

PTFE / Reinforced PTFE / Buna-N /

Grapholi / Graphite

End Connections :

Screwed to BSP / NPT / Socket Weld

Butt Weld with extended Nipple

/ Butt Weld Ends / Flanged Ends.

Pressure Rating :

ASA 150# / 300# / 600# /

Type :

Single PC / Two Pc / Three Pc

Operated:

Lever / Gear

Size Range :

6mm to 300mm



GATE VALVES

API 600 / API 6D

Material Of Construction :

CI / CS / SS / WCB / WC6 / Wc9

End Connections :

Screwed to BSP / BSPT / NPT /

Socket Weld / Butt Weld Ends /

Flanged Ends / Ring Type Joints (RTJ)

Pressure Rating :

ASA 125# / 150# / 300# /

Operation :

Manual / Gear

Size Range :

15mm to 600mm



GLOBE VALVES

BS-1873 / ND-16 / ND-40

Material Of Construction :

CI / CS / SS

End Connections :

Screwed to BSP / BSPT / NPT /

Socket Weld / Butt Weld Ends /

Flanged Ends

Pressure Rating :

ASA 125# / 150# / 300# /

PN 16 / PN 40

Operation :

Manual / Gear

Size Range :

15mm to 600mm



WAFER, DUAL PLATE CHECK VALVES

API 6D / API 594

Material Of Construction :

CI / CS / SS / WC6 / Wc9 / GM

End Connections :

Wafer Type / Flanged

Pressure Rating :

ASA 125# / 150# / PN 16

Size Range :

25mm to 300mm



DAIRY & PHARMA VALVE

Material Of Construction :

SS 304 / SS 316

Butterfly valve,

SMS Type, TC Type & Weldable type,
Sandwich type

Ball valve,

TC Type, SMS Type

Plug valve,

SMS Two way, Three way

Non return valve,

SMS Type, TC Type & Weldable type

Diaphragm Valve / Zero Dead lug valve,

Cornical filter / Inline filter / Flow control valve,

Spray ball, View glass Valve.



GUN METAL / BRONZE VALVES

Gate Valve as per IS 778 CL-I
Globe Valve as per IS 778 CL-I
Horizontal Non Return Valve
as per IS 778 CL-I
Steam Stop Valve



STRAINERS

Material Of Construction :

Cast Iron / Cast Steel / Stainless Steel

End Connections :

Flanged Ends / Screwed End

Type :

Y Type / T Type /

Pot Type / Basket type

Pressure Rating :

ASA 150# / 300# / PN 40

Size Range :

15mm to 300mm



SLUICE & REFLUX VALVES

IS 5312

Material Of Construction :

Body : Cast Iron / C.S. with G.M. or S.S. Internals

End Connections :

Flanged Ends

Pressure Rating :

Rating : PN 0.6 / PN 1.0 / PN 1.6

Body : 0.9 Mpa / 1.5 Mpa / 2.4 Mpa

Seat : 0.6 Mpa / 1.0 Mpa / 1.6 Mpa

Type :

Bolted Cover / Swing Type

Size Range :

50mm to 600mm



STAINLESS STEEL - GATE / GLOBE / NRV

SCREWED END

Material Of Construction :

SS 304 / SS 316 / SS 304L / SS 316L

End Connections:

Screwed to BSP / BSPT / NPT /

Socketweld to ASME B 16.11

Pressure Rating :

Body : 425 Psig (30 Kg/Cm)²

Seat : 300 Psig (21 Kg/Cm)²

Size Range :

15mm to 50mm



FORGED STEEL VALVES - GATE, GLOBE, CHECK

API 602 / BS-5352

Material Of Construction :

ASTM A 105 / F304 / F304L / F316 /
F316L

End Connections :

Socket Weld / Screwed / Butt Weld /

Flanged Ends

Type :

Y Type Pattern

Pressure Rating :

ASA 800# / 1500# / 2500#

Size Range :

15mm to 50mm



Website : www.bharatvalve.com

Mr Bhavesh Purohit

+91 98335 28654

+91 90294 37029 / 70213 29294

+91-22 6639 4427 / 6743 7573
+91-22-6610 9545



BHARAT VALVE AND FITTINGS

Shop No:2, 74 CP Tank, Girgaon, Mumbai-40000

Shop No. 7, Grd Floor, 59/61, Velkar House, 2nd Panjrapole Lane, Gulalwadi, Mumbai - 400 004.

sales@bharatvalve.com / bharatvalve1008@gmail.com